

Owner's Manual

Model

PH8




Phono Preamplifier

audio research
HIGH DEFINITION®

Contents

Model PH8 Phono Preamplifier

Illustrations	4
Preface	5
Warnings	5
Packaging	5
Front Panel Controls	5 – 6
Remote Control Functions	6
Connections	6
Installation Instructions	6 – 7
Operating/ Start-up Procedure	7
Servicing	7
Cleaning	7
Disposal and Recycling Guidelines	7
Warranty Terms and Conditions	8
Specifications	8

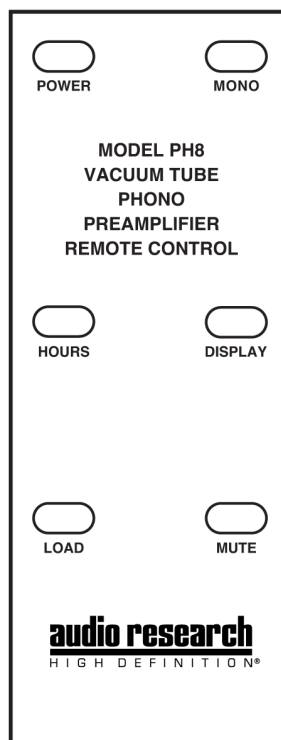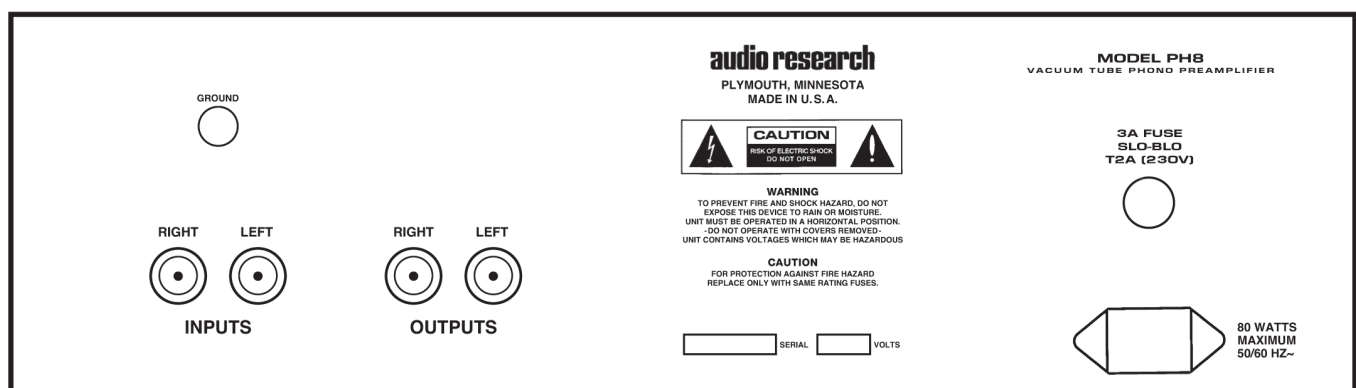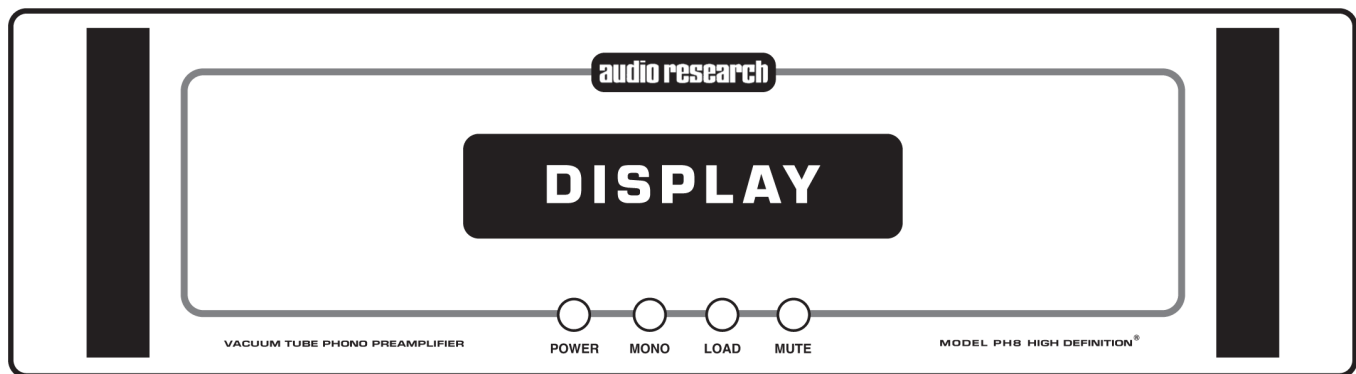

Preface

Please take the time to carefully read this instruction manual prior to installation or use of your PH8 phono preamplifier. Because it is a highly advanced electronic instrument, there are several facts and procedures you should know before you place it in operation.


Just as you would not purchase and attempt to operate an expensive camera, computer system or high-performance automobile without first learning something about performance parameters and correct operating procedures, so too your phono preamplifier requires some familiarization before you make it part of your music reproduction system. Your reward, in terms of maximum performance and a long service life, will be well worth the effort.

Warnings

- 1.To prevent fire, or shock hazard, do not expose your PH8 to rain or moisture.
- 2.This unit contains voltages which can cause serious injury or death. Do not operate with cover removed. Refer servicing to your authorized Audio Research dealer or other qualified personnel.
- 3.The power cord on your PH8 is equipped with a standard three-prong grounding plug. For absolute protection, **do not defeat the ground power plug**. This provides power line grounding of the PH8 chassis to provide absolute protection from electrical shock.
- 4.For continued protection against fire hazard, replace the fuse only with the same type and rating as specified at the fuse holder.



DO NOT ATTEMPT TO OPERATE THIS EQUIPMENT BEFORE INSTALLING THE VACUUM TUBES IN THEIR PROPER SOCKETS.

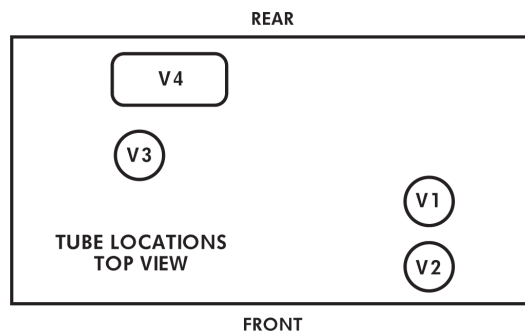

Packaging

Save all packaging in a dry place away from fire hazard. Your PH8 phono preamplifier is a precision electronic instrument and should be properly cartoned any time shipment is made. You may not have occasion to return your unit to the factory for service, but if that should prove necessary, or other occasion requiring shipment occurs, the original packaging will protect your PH8 from unnecessary damage or delay.

Note that your PH8 has been shipped with the vacuum tubes installed in a protective foam blocks under the top cover. With the PH8 unplugged, use a phillips-head screwdriver to loosen the fastening screws, remove the top cover and set aside. Install the numbered tubes in their respective sockets, refasten the top cover and store the foam blocks with your carton.

Front Panel Controls

POWER ON/OFF: The unit is off when no front panel lights are lit; unit defaults to 'off' whenever it is unplugged and then plugged in. Press the Power switch to turn unit on: display will light and after approximately 30 seconds the mute light will stop flashing and stay on continuously (along with the power light

and chosen cartridge loading value) indicating unit is ready to play.

MUTE: After unit is on and warmed up for at least 30 seconds, the unit defaults to mute position indicated by continuously lit Mute on the display. Pressing the Mute switch once so Mute is unlit unmutes the PH8 for play and Operate appears on the display; pressing the Mute switch again lights Mute and mutes the PH8.

MONO: Unit defaults to stereo at turn on. Pressing the Mono switch selects between stereo and mono operation, as indicated on the display.

LOAD: Pressing the load switch allows the user to step through five pre-set cartridge loading options (47K, 1000, 500, 200, and 100 ohms) with the number on the display lit for the currently selected load value. It is suggested that you select the loading value nearest the cartridge manufacturers loading recommendation to begin with and then listen to alternate loading if desired. Because all four PH8 front panel functions are duplicated on the remote, you may listen to loading sonic changes from the listening position by repeatedly pressing the Load button to scroll through the values. (Note that depending on the phono cartridge the volume level may decrease as lower loading values are selected.)

Remote Control Functions

In addition to all of the front panel functions, the remote also accesses the following functions:

DISPLAY: Pressing the display button on the remote allows you to scroll through and select from eight levels of display brightness as well as turning the display off.

HOURS: Pressing the hours button on the remote will activate the total accumulated tube hours on the display for about seven seconds and then return to the default load value function.

Connections

INPUT CONNECTORS: There is one set of RCA input connectors, which should be

connected to your turntable/toner arm cable.

OUTPUT CONNECTORS: There is one set of RCA output connectors which should be connected to line inputs (Direct, Aux, Spare, Tuner, etc.) of your line stage/preamplifier. Single ended RCA to balanced adapters are available from Audio Research allowing the PH8 to be connected directly to a balanced input preamplifier using single ended RCA interconnects.

All input/output connectors are gold plated and connect 'ground' before 'hot'. On disconnect, 'hot' is disconnected first.

Note: A 'passive' line stage is not recommended for use with the PH8 as it will not provide the gain necessary to amplify the output of the PH8 to adequate levels to the power amplifier.

Installation Instructions

While the PH8 does not dissipate an unusual amount of heat, it is important that it have a reasonable airflow to assure long, trouble-free operation.

In addition, the following installation guidelines will help insure maximum sonic performance as well as reliable service.

1. Upright and horizontal mounting is required if extended operation (longer than one hour) is contemplated.
2. Do not 'stack' the PH8 on top of other equipment: not only could this cause overheating, but 'hum' may be introduced into the phono circuits from the proximity of the power transformer of the other equipment.
3. Do not place or operate unit on a soft or irregular surface such as a rug. This will prevent proper ventilation.
4. Do not operate unit without the top and bottom covers installed. These are required both for safety as well as shielding from interference (except in service operations).
5. If side-by-side mounting with other equipment is employed, place the PH8 to the left of the other chassis, so as to provide maximum spacing between

the transformer of the PH8 and the other component.

6. In a cabinet or rack-mount installation which has an enclosed back, an exhaust fan is desirable so as not to operate the PH8 in overheated ambient air. Operation of vacuum tube equipment for long periods of time in hot ambient air will shorten tube life and increase chance of failure of other component parts.

Operating/Start-up Procedure

1. Secure connections between turntable, PH8, and line stage preamplifier. Note: Given the advanced performance capabilities of the PH8, it is extremely important that high-quality interconnects be used for connection to ancillary electronics.
2. Plug 3-prong power cord into a grounded AC wall receptacle.
3. Turn Power switch 'on'. The display will light and Mute will flash for approximately 30 seconds while the power supply stabilizes, indicating operation of the automatic muting circuit. After this warm-up period Mute will stay on and the cartridge loading value will appear, indicating the PH8 is ready for operation.
4. Unmute PH8, select proper cartridge loading and play.

Note: For superior sonic performance, a warm-up period of at least one hour is recommended.

Servicing

Because of its careful design and exacting standards of manufacture, your PH8 should normally require only minimal routine service to maintain its high level of performance.



CAUTION: Your PH8 contains sufficient levels of voltage and current to be lethal. Do not tamper with

a component or part inside the unit. Refer any needed service to your authorized Audio Research dealer or other qualified technician.

The vacuum tubes inside your PH8 are 6H30 dual triodes and a 6550C. With normal use they should last approximately 2,000 to 4,000 hours.

Cleaning

To maintain the visual appearance of your PH8 phono preamplifier, occasionally wipe the front panel and top cover surfaces with a soft, damp (not wet) cloth to remove dust. A mild, non-alkaline soap solution may be used to remove fingerprints or similar smudges. Cleaners containing abrasives should not be used as they will damage the 'brushed' grain of the front panel finish. A dry 2-inch pure bristle paintbrush works well to remove dust from bevels, reliefs and switches.



Disposal and Recycling Guidelines

To dispose of this electronic product, do not place in landfill. In accordance with the European Union Waste Electrical and Electronic Equipment (WEEE) directive effective August 2005, this product may contain regulated materials which upon disposal require special reuse and recycling processing. Please contact your dealer or importing distributor for instructions on proper disposal of this product in your country. Or, contact Audio Research Corporation (763.577.9700) for the name of your importing distributor and how to contact them. Packing and shipping materials may be disposed of in a normal manner.

Limited Warranty

Audio Research Corporation products are covered by a 3-Year Limited Warranty, or a 90-Day Limited Warranty (vacuum tubes). This Limited Warranty initiates from the date of purchase, and is limited to the original purchaser, or in the case of demonstration equipment, limited to the balance of warranty remaining after original shipment to the retailer or importer. In the United States, the specific terms, conditions and remedies for fulfillment of this Limited Warranty are listed on the warranty card accompanying the product in its shipping carton, or may be obtained from the authorized retailer or from the Audio Research Customer Service Department. Outside the United States, the authorized importing retailer or distributor has accepted the responsibility for warranty of Audio Research products sold by them. The specific terms and remedies for fulfillment of the Limited Warranty may vary from country to country. Warranty service should normally be obtained from the importing retailer or distributor from whom the product was purchased. In the unlikely event that technical service beyond the ability of the importer is required, Audio Research will fulfill the terms and conditions of the Limited Warranty. Such product must be returned at the purchaser's expense to the Audio Research factory, along with a photocopy of the dated purchase receipt for the product, a written description of the problem(s) encountered, and any information necessary for return shipment. The cost of return shipment is the responsibility of the purchaser.

Specifications

FREQUENCY RESPONSE: $\pm .2$ dB of RIAA, 10Hz to 60kHz; 3dB points below 0.3Hz and above 400kHz.

DISTORTION: Less than .005% at .50V RMS 1kHz output.

GAIN: 58dB at 1kHz (MC & MM compatible).

PUSH BUTTONS: Power, Mono, Load, Mute.

INPUT IMPEDANCE: Selectable 47K, 1000, 500, 200, or 100 ohms with 200pF Unbalanced.

OUTPUT IMPEDANCE: 200 ohms Unbalanced. Recommended load 50K-100K ohms and 100pF. (10K ohms minimum and 2000pF maximum.)

OUTPUT POLARITY: Non-Inverting.

MAXIMUM INPUTS: 70mV RMS at 1kHz (180mV RMS at 10kHz).

RATED OUTPUTS: .50V RMS 10Hz to 60kHz, 100K ohm load (output capability is 50V RMS output at 1/2% THD at 1kHz).

POWER SUPPLIES: Electronically-regulated low and high voltage supplies. Line regulation better than .01%.

NOISE: 0.2uV equivalent input noise, IHF weighted, shorted input (74 dB below 1mV 1kHz input).

TUBE COMPLEMENT: (2) 6H30 dual triodes with JFET input. 6550 and 6H30 as HV regulators.

POWER REQUIREMENTS: 100-135 VAC 60Hz (200 - 270VAC 50/60Hz) 80 watts maximum. Line fuse 3A slo blo (1.5A slo blo 230V). Standby: Less than 1 watt.

DIMENSIONS: 19" (47 cm) W x 5.22" (13.2 cm) H x 12.0"

(30.5 cm) D. Rear chassis fittings extend 0.6" (1.5 cm).

WEIGHT: 15 lbs. (6.8 kg) Net; 23 lbs. (10.5 kg) Shipping.

Specifications subject to change without notice.
©2010 Audio Research Corporation.

audio research

3900 Annapolis Lane North

Plymouth, MN 55447

763.577.9700

www.audioresearch.com