




Crafted.
Honed.
Perfected.

Introducing the new 700 Series Signature. The 700 Series Signature combines state-of-the-art engineering with the highest possible standards of design, finish and quality. Every speaker is crafted with care, honed by experience and perfected with passion.


Crafted

Exquisite Datuk Gloss finish for loudspeakers that look as beautiful as they sound. Each pair of speakers is unique, with no two models sharing the same grain pattern.

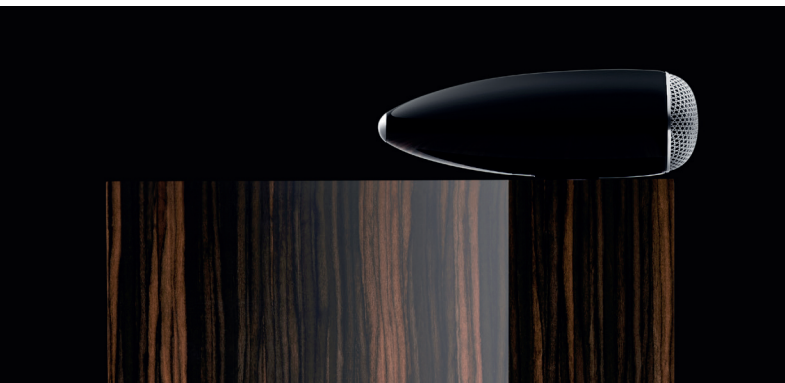

Honed

Expertly tuned for exceptional detail and clarity, enabled by upgraded crossover designs and components.

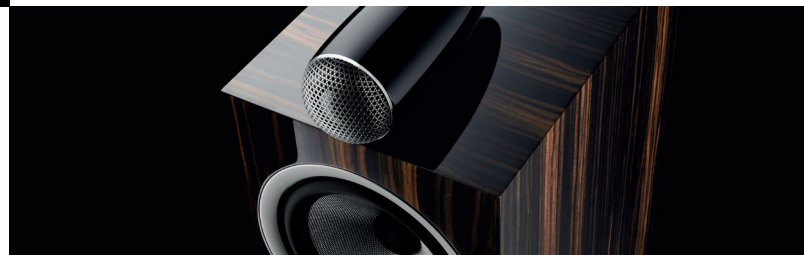

Perfected

Signature is the culmination of decades of loudspeaker design. It embodies everything we know – and here, it's applied to 700 Series for the first time.

Downloaded from www.linephaze.com

- Find specs, manuals and used listings across thousands of audio products.



702 Signature

Technical features	Decoupled Carbon Dome™ tweeter
	Solid Body Tweeter on top
	Continuum™ cone FST™ midrange
	Decoupled midrange
	Aerofoil™ Profile bass cones
Description	Flowport™
	3-way vented-box system
	1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
	1x ø150mm (6 in) Continuum cone FST midrange
	3x ø165mm (6.5 in) Aerofoil Profile bass
Drive Units	
Frequency range (-6dB)	-6dB at 28Hz and 33kHz
	45Hz - 28kHz ±3dB
	90dB spl (2.83V _{RMS} , 1m)
	2nd and 3rd harmonics (90dB, 1m)
	<1% 86Hz - 28kHz
Frequency response	<0.5% 110Hz - 20kHz
	8Ω (minimum 3.1Ω)
	30W - 300W into 8Ω on unclipped programme
	power
Sensitivity	
Harmonic distortion	
Nominal impedance	
Recommended amplifier power	
Dimensions Height:	994mm (39 in) cabinet only
	1087mm (42.8 in) including tweeter and plinth
	200mm (7.9 in) cabinet only
	366mm (14.4 in) including plinth
	337mm (13.3 in) cabinet only
Width:	364mm (14.3 in) including grille and terminals
	414mm (16.3 in) including plinth
Depth:	
Weight	29.5kg (65 lb)
Finishes	Cabinet
	Datuk Gloss
	Grille:
	Black



705 Signature

Technical features	Decoupled Carbon Dome tweeter
	Solid Body Tweeter on top
	Continuum cone bass / midrange
	Flowport
Description	2-way vented-box system
	1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
	1x ø165mm (6.5 in) Continuum cone bass / midrange
Drive Units	
Frequency range (-6dB)	-6dB at 45Hz and 33kHz
	50Hz - 28kHz ±3dB
	88dB spl (2.83V _{RMS} , 1m)
	2nd and 3rd harmonics (90dB, 1m)
	<1% 100Hz - 22kHz
Frequency response	<0.5% 150Hz - 20kHz
	8Ω (minimum 3.7Ω)
	30W - 120W into 8Ω on unclipped programme
	power
Sensitivity	
Harmonic distortion	
Nominal impedance	
Recommended amplifier power	
Dimensions Height:	340mm (13.4 in) cabinet only
	407mm (16 in) including tweeter
	200mm (7.8 in)
	285mm (11.2 in) cabinet only
	301mm (11.9 in) including grille and terminals
Width:	
Depth:	
Weight	9.3kg (20.5 lb)
Finishes	Cabinet
	Datuk Gloss
	Grille:
	Black

