


Downloaded from www.linephaze.com

- Find specs, manuals and used listings across thousands of audio products.



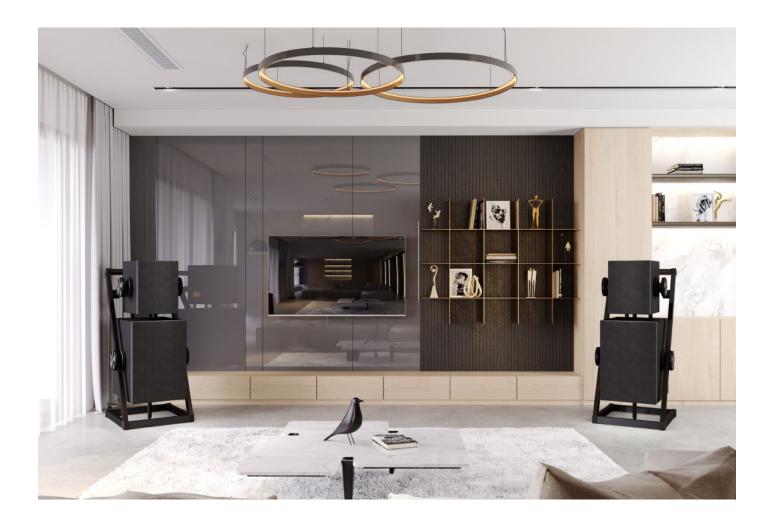

WIRELESS SPEAKER

SATYA

DRIVERS

1 x soft dome tweeter

1 x 7" medium

 1×12 " woofer, selected for their high linearity and dynamics

FREQUENCY RESPONSE

28 Hz (-6 dB) > 25 kHz

BASS LOAD

Vent loading

PRECISE

The modeling calculates the loudspeaker system in impedance, volume velocity, membrane displacement, and sound pressure anywhere in space, amplitude, phase, and group delay.

VOLTAGE

Nominal range: 115 V or 230 V (+/-15%)

AMPLIFIER (BUILT-IN TELOS)

Built-in 650 W Telos amplifier per unit

 2×175 W for tweeter & medium

1 x 300 W for wooferr

INPUTS

1 x digital S/PDIF

1 x wireless audio

RATED POWER CONSUMPTION

480 W per unit

TOTAL SIZE & WEIGHT PER UNIT

56 W x 123 H x 63 D (cm)

140 kg per side

COLOR

Black | Silver Grey

Downloaded from www.linephaze.com

- Find specs, manuals and used listings across thousands of audio products.